

Model B / T/ K6

Coffee Grinders


B & T models are good value grinders, providing well ground coffee in sufficient quantity for any coffee bar or restaurant. They are manufactured from polished stainless steel and have adjustable grinder blades and portion control. Coffee is dispensed into the filter holder with a flick lever mechanism. The extensive K series automatic grinders are manufactured from die-cast polished and painted aluminium and are a stylish complement to the Fracino range.



Technical Specifications

Model	Height	Width	Depth	Hopper Capacity	Dispenser Capacity	7g Shot Times (sec)	Motor RPM/Watt	Grinding Blades
B	470mm	210mm	380mm	1 Kg	300g	N/A	1300/275w	60mm flat
T	560mm	180mm	310mm	1 Kg	600g	N/A	1300/275w	60mm flat
K6	635mm	215mm	400mm	1.7 Kg	300g	N/A	1395/240w	64mm flat

Gas Machine Requirements

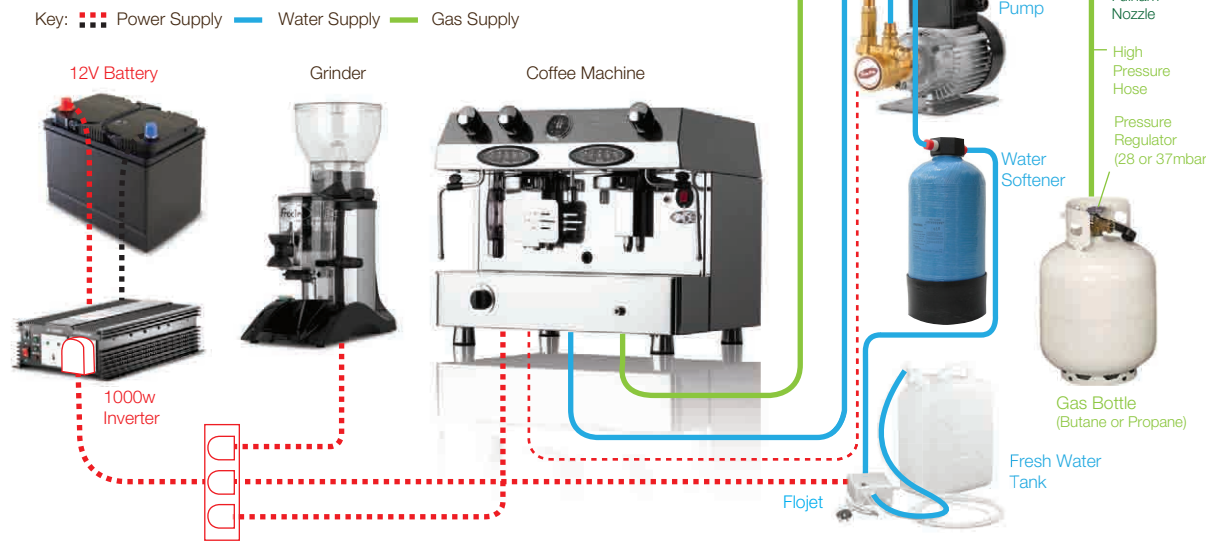

DUALFUEL



DUALFUEL



Fracino 18-22 Birch Road East, Birmingham, B6 7DB, UK.
Website / www.fracino.com Email / sales@fracino.com
Tel / +44 (0)121 328 5757 Fax / +44 (0)121 327 3333

The Fracino company policy is one of continuous improvement. We retain the right to change specification without prior notice.

Fracino®

DUALFUEL

Espresso on the go

The Fracino 1 & 2 group Contempo and Retro coffee machines are also available as a dual fuel option. With the same great specification as our standard 1 and 2 group machines, but with the option to use LPG, Butane or electricity, they provide unrivalled flexibility and mobility whilst still retaining high volume output. These machines are ideal for mobile catering units and 'espresso on the go.'

The high powered gas burners for these machines provide the equivalent power of their electric counterparts, ensuring that there will be no loss of steam pressure during busy serving periods. Fracino are proud to claim that their gas machines are the most powerful in the world.



Technical Specifications


Model	Groups	Cups Per/Hour	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)	Boiler Capacity	Gas Rating	Electric Rating	Element Rating
FCL1 LPG	1	100	830*	375	500	35	7 Litres	1800 watts	50 watts	2.7kw
FCL2 LPG	2	200	830*	580	500	55	14 Litres	5500 watts	50 watts	2.85kw
FCL1	1	100	830*	375	500	35	7 Litres	N/A	13amp	2.7kw
FCL2	2	200	830*	580	500	55	14 Litres	N/A	13amp	2.85kw

* Size from the bottom of the machine to top of the lever.

Key Features

- Unique dual spring high pressure lever group, delivering 9bar pressure.
 - Compact design.
 - Large capacity top quality copper boiler, heated by a multiple looped element, or by gas, or both.
 - Pressure controlled by a triple contact pressure switch (electric machine only).
 - Brass-bodied, smooth-action lever group with stainless steel shower plate.
- Highest powered LPG system in the world provides unrivalled output of coffee, hot water and steam.
 - Automatic water level system with a probe, electronic control unit and solenoid valve.
 - LPG or Butane fuelled burner, equivalent to 4kw electrical power rating, fitted with electronic ignition and flame failure safety device.
 - Boiler pressure is controlled by a gas pressure valve set at 1.0 bar, with a low flame adjustment which controls the gas burner. Please note: a 37(LPG) / 30(BUTANE) mbar gas pressure regulator must be fitted prior to installation of the machine (dual fuel gas machine only).

CONTEMPO

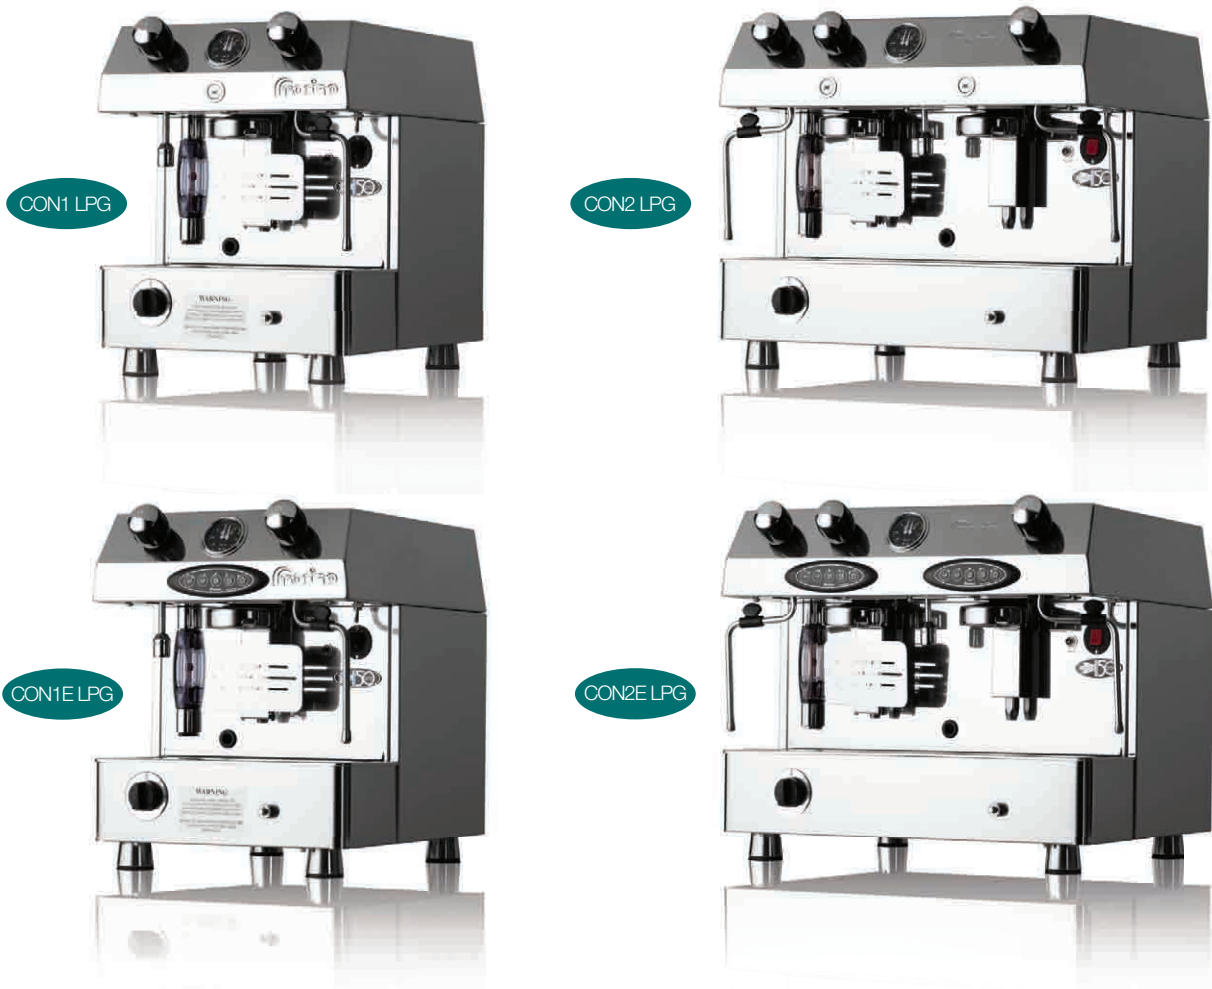

Technical Specifications

Model	Groups	Cups Per/Hour	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)	Boiler Capacity	Gas Rating	Electric Rating	Element Rating
CON1 LPG Semi	1	120/200	480	375	500	35	7 Litres	1800 watts	350 watts	2.8kw
CON2 LPG Semi	2	200/400	480	580	500	55	14 Litres	5500 watts	350 watts	2.85kw
CON1E LPG Auto	1	120/200	480	375	500	35	7 Litres	1800 watts	350 watts	2.8kw
CON2E LPG Auto	2	240/400	480	580	500	55	14 Litres	5500 watts	350 watts	2.85kw

Key Features

- Top quality copper boiler heated by multiple looped element.
 - Pressure controlled by a triple contact pressure switch.
 - Automatic water level system with a probe, electronic control unit and solenoid valve.
 - The pressure of water and steam is separately controlled by brass safety valves.
 - Hot water and steam are released by rotating the valve handles on the solid brass valves.
 - Brass bodied group with stainless shower plate, solenoid valve and high pressure pump.
 - Thermosyphonic circulation ensures the group is kept constantly hot for perfect coffee making with temperature control on each group.
- Case, waste and cup tray are all made from stainless steel 304.
 - Espresso tray for use with the high group feature, ensuring a perfect espresso.
 - Operates on either gas, electricity or both.
 - High groups to accommodate large takeaway cups and latte glasses, with clearance of 132mm.
 - Highest powered LPG system in the world provides unrivalled output of coffee, hot water and steam.
 - LPG or Butane fuelled burner, equivalent to 4kw electrical power rating, fitted with electronic ignition and flame failure safety device.
 - Boiler pressure is controlled by a gas pressure valve set at 1.0 bar, with a low flame adjustment which controls the gas burner. Please note: a 37(LPG) / 30(BUTANE) mbar gas pressure regulator must be fitted prior to installation of the machine.

DUALFUEL